


# **Solid Wood Art Table** with Laminate Top Assembly Instructions


### **Tools Required for Assembly:**

Tables: AT3060FM AT4260FM AT4272FM

- 3/8" Ratchet with 1/2" Socket & 3" Extension
- · Flat Screwdriver

#### **Included Hardware:**

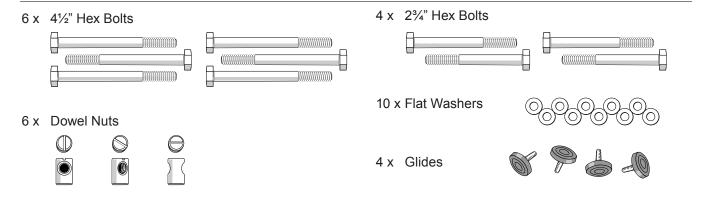

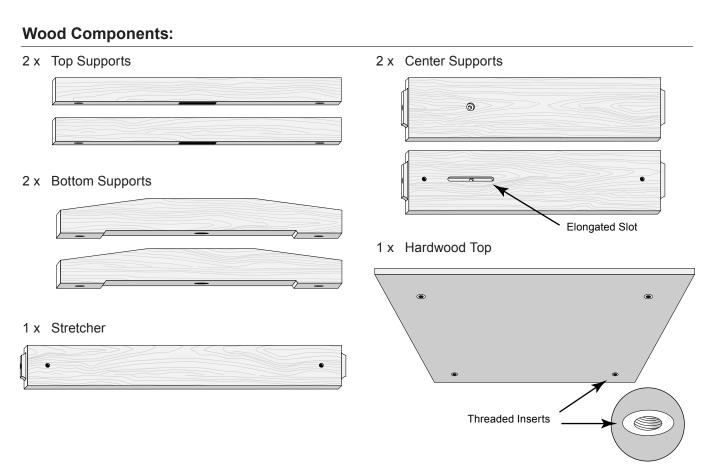

## LaminateTop Art Table

Assembly continued

### Step 1. Leg Assembly:

A) Fit Top and Bottom Supports to the Center Support. Position the elongated slot toward the top.


Insert Dowel Nuts as shown. Use a screwdriver to align the Dowel Nuts, then thread 4½" Hex Bolts with Washers into the Dowel Nuts and tighten firmly.


Repeat for the second leg assembly.


B) Install Glides in the Bottom Supports.



C) Fit Stretcher into the elongated slots in Center Supports. Insert Dowel Nuts and 4½" Bolts With Washers as shown. Do not fully tighten yet.

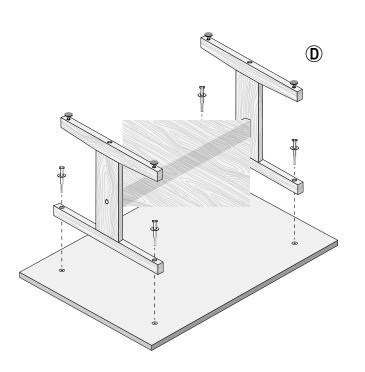

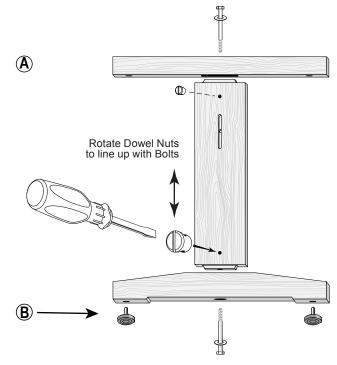



### Step 3. Attach Laminate Top:

**D)** Lay Table Top upside-down on a clean surface. Position leg assembly by aligning bolt holes in the Top Support with the Threaded Inserts in Table Top.

Install 23/4" Hex Bolts and Washers. Fasten loosely.

When all four bolts are installed, fully tighten the bolts holding the Table Top, then the bolts attaching the Stretcher to the Leg Assemblies.

With a helper, turn the table upright and enjoy your new Art Table!

For customer service call 800-999-0386






# **Solid Wood Art Table** with Hardwood Top Assembly Instructions


Tables: AT4260HM AT7272HM

### **Tools Required for Assembly:**

- 3/8" Ratchet with 1/2" Socket & 3" Extension
- · Flat Screwdriver

#### **Included Hardware:**

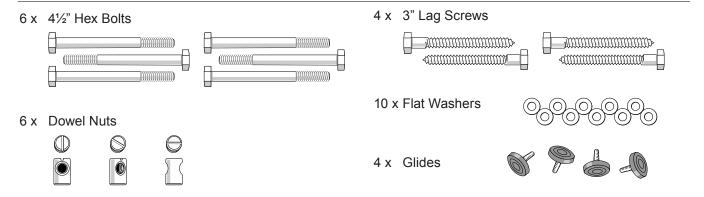

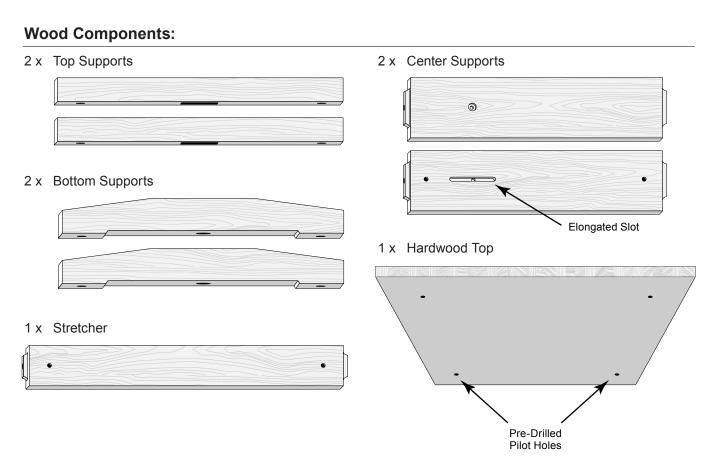

## Hardwood Top Art Table

Assembly continued

### Step 1. Leg Assembly:

A) Fit Top and Bottom Supports to the Center Support. Position the elongated slot toward the top.


Insert Dowel Nuts as shown. Use a screwdriver to align the Dowel Nuts, then thread 4½" Hex Bolts with Washers into the Dowel Nuts and tighten firmly.


Repeat for the second leg assembly.


B) Install Glides in the Bottom Supports.



C) Fit Stretcher into the elongated slots in Center Supports. Insert Dowel Nuts and 4½" Bolts With Washers as shown. Do not fully tighten yet.

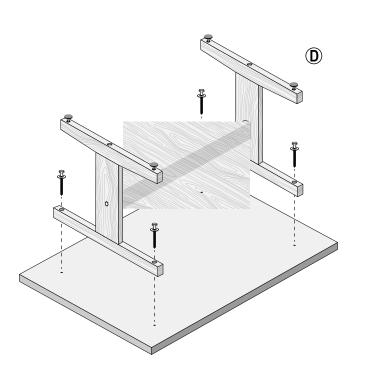

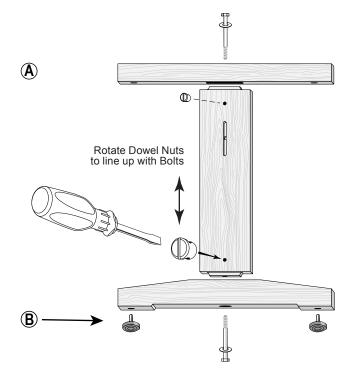



### Step 3. Attach Hardwood Top:

**D)** Lay Table Top upside-down on a clean surface. Position leg assembly by aligning bolt holes in the Top Support with the Pre-drilled Holes in Table Top.

Install 3" Lag Screws and Washers. Fasten loosely.

When all four screws are installed, fully tighten the screws holding the Table Top, then the bolts attaching the Stretcher to the Leg Assemblies.

With a helper, turn the table upright and enjoy your new Art Table!

For customer service call 800-999-0386

